


Key Features

- **Made-to-Measure** for the exact width of your flat panel display
- **Ultra slim profile** – only two inches deep
- **Premium ribbon HF driver technology** for precise vocal articulation
- **Can be used with an optional Innovox sub-bass** in 2.1 applications

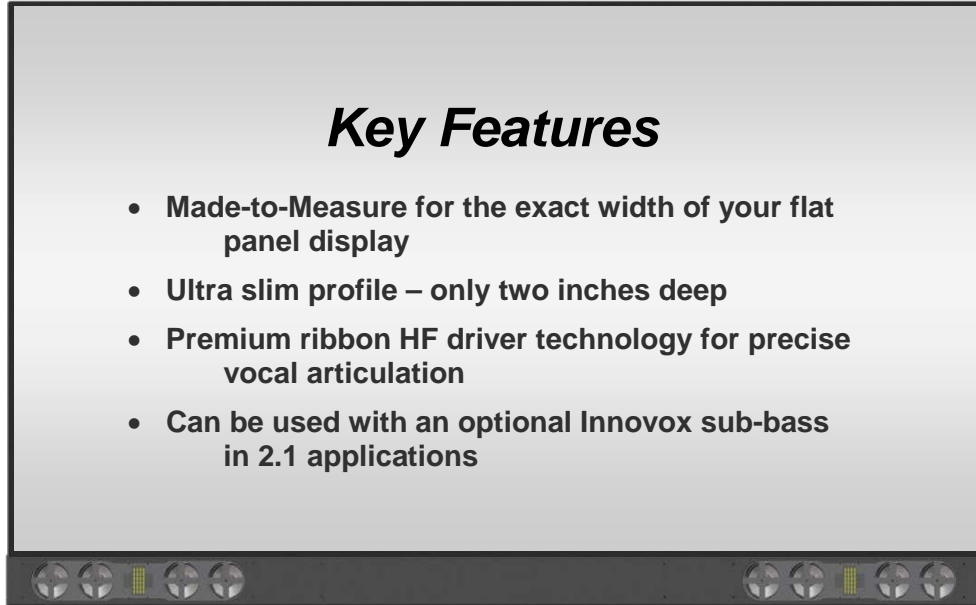

(shown without grille)

DESCRIPTION

The Flex Precision Powered Series adds a dual 125 Watt Class D amplifier to the standard FP-H2.

As with the unpowered version, the **Flex Precision** Model **FP-H2P** is an ultra slim two-channel horizontal loudspeaker designed to mate with flat panel video displays. It has been developed to complement superior flat panel video displays with high resolution audio. Premium low frequency drivers are employed in combination with precision ribbon HF drivers and sophisticated sequential filter networks to render an audio signal of exceptional clarity and detail. Nominal coverage angle is 90° H x 120° V. Configuration per channel includes four 3.5" long-excursion LF drivers and one precision ribbon HF driver.

NOMINAL DATA

Frequency Response	120 – 20,000 Hz, ± 3 dB
Amplifier Power	2 x 125 W RMS
Maximum Output	103 dB long term; 109 dB peak
Nominal Coverage Angles	90° H x 120° V
Dimensions	height: 4.06 " width: 32.00 – 96.00 " (custom) depth: 2.43 "
Net Weight	14-24 lbs. (depending on length)
Shipping Weight	17-27 lbs. (depending on length)

DESCRIPTIVE DATA

System Configuration	Display-mounted dual channel
Components & Loading (per channel)	(4) 3.5 " low-profile woofers; (1) 3.25" ribbon tweeter
Enclosure Type	Sealed enclosure
Enclosure Material	Extruded ABS plastic with steel baffle plate
Finish	Black is standard; (custom colors available)
Connectors	Dual 3 pos. Phoenix (balanced input)
Grille	Integral fabric wrap

DIMENSIONAL DRAWINGS

