
FLEX PRECISION Series -



FP-V2P

Self-Powered

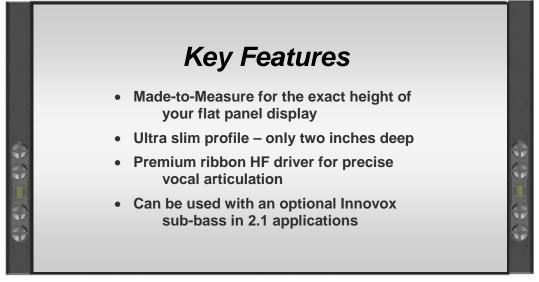

(speakers shown without grilles)

(sold in pairs)

DESCRIPTION

The Flex Precision Powered Series adds a dual 125 Watt Class D amplifier to the standard FP-V2.

As with the unpowered version, the *Flex Precision* Model **FP-V2P** is an ultra slim vertical loudspeaker pair designed to mate with flat panel video displays. It has been developed to complement superior flat panel video displays with high resolution audio. Premium low frequency drivers are employed in combination with precision ribbon HF drivers and sophisticated sequential filter networks to render an audio signal of exceptional clarity and detail. Nominal coverage angle is 120° H x 100° V. Configuration per channel includes four 3.5" long-excursion LF drivers and one precision ribbon HF driver.

NOMINAL DATA

width:

depth:

DESCRIPTIVE DATA

Frequency Response 120 – 20,000 Hz ± 3 dB System Configuration Low profile custom-sized side-mount speaker for flat-panel displays

Amplifier Power 2 x 125 W RMS

Maximum Output 103 dB long-term, 109 dB peak

Components & Loading (4) 3.5 " woofers; (1) 3.25" ribbon HF driver

Nominal Coverage Angles 120° H x 100° V Enclosure Type Sealed enclosure

Enclosure Material Extruded ABS plastic with steel baffle plate

4.06 "
2.43" Finish Black is standard;

Net Weight 12-19 lbs per pair (custom colors available)

(depending on height) Input Connectors Dual 3-pos. Phoenix (balanced input)

Shipping Weight 15-22 lbs per pair Speaker Connectors 2 pole Phoenix on amplifier &

(depending on height) passive speaker

Grille Integral fabric wrap

296 North Pascal Street Saint Paul MN 55104 innovoxaudio.com



FLEX PRECISION Series™

FP-V2P

DIMENSIONAL DRAWINGS

