


*(requires 78" diagonal or larger display)*

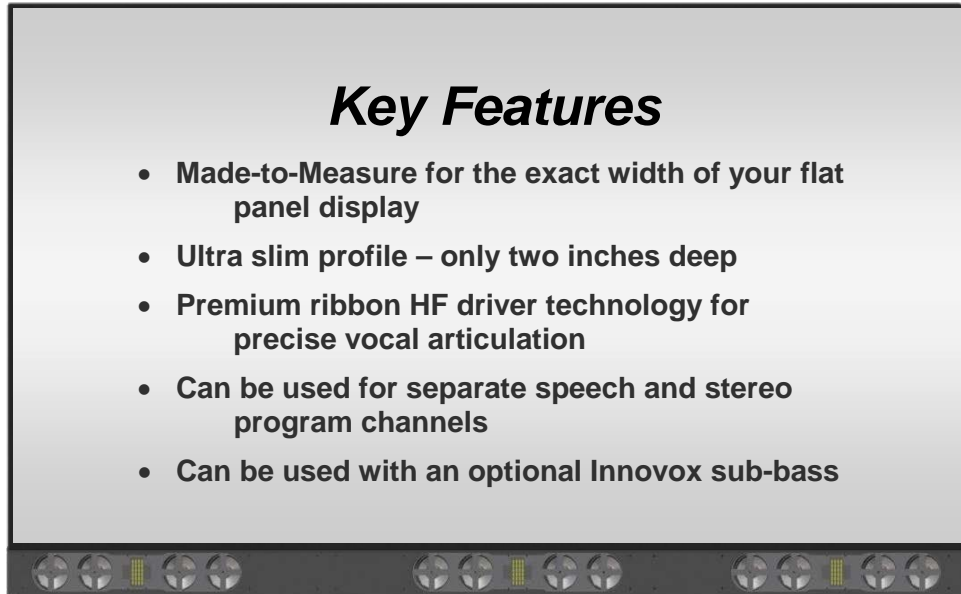

*(shown without grille)*

## Key Features

- **Made-to-Measure** for the exact width of your flat panel display
- **Ultra slim profile** – only two inches deep
- **Premium ribbon HF driver technology** for precise vocal articulation
- **Can be used for separate speech and stereo program channels**
- **Can be used with an optional Innovox sub-bass**

## DESCRIPTION

The **Flex Precision** Model **FP-H3** is an ultra slim three-channel horizontal loudspeaker designed to mate with flat panel video displays. Nominal coverage angle is 90° H x 120° V. Configuration per channel includes four 3.5" long-excursion LF drivers and one precision ribbon HF driver.

It has been developed to complement superior flat panel video displays with high resolution audio. Premium low frequency drivers are employed in combination with precision ribbon HF drivers and sophisticated sequential filter networks to render an audio signal of exceptional clarity and detail.

### NOMINAL DATA

Frequency Response	120 – 20,000 Hz, ± 3 dB
Sensitivity	92 dB @ 2.83 volts / 1M
Impedance	6 Ω (each channel)
Power Handling	90 W long term (AES-2) (per channel)
Maximum Output	105 dB long term; 111 dB peak
Nominal Coverage Angles	90° H x 120° V
Dimensions	height: 4.10 " width: 60.00 – 96.00 " (custom) depth: 2.10 "
Net Weight	18-25 lbs (depending on length)
Shipping Weight	21-29 lbs (depending on length)

### DESCRIPTIVE DATA

System Configuration	Horizontal 3-channel
Components & Loading (per channel)	(4) 3.5 " LF drivers; (1) 3.25 " ribbon HF driver
Recommended High-Pass Filter	4 <sup>th</sup> order Butterworth @ 100 Hz
Enclosure Type	Sealed enclosure
Enclosure Material	Extruded ABS plastic
Finish	Black standard (custom colors available)
Connectors	Phoenix
Grille	Integral fabric wrap