


## Key Features

- **Made-to-Measure** for the exact width of your flat panel display
- **Ultra slim profile** – only two inches deep
- **Premium ribbon HF driver technology** for precise vocal articulation
- **Can be used as a center channel** in a surround sound system
- **Can be used with an optional Innovox sub-bass**

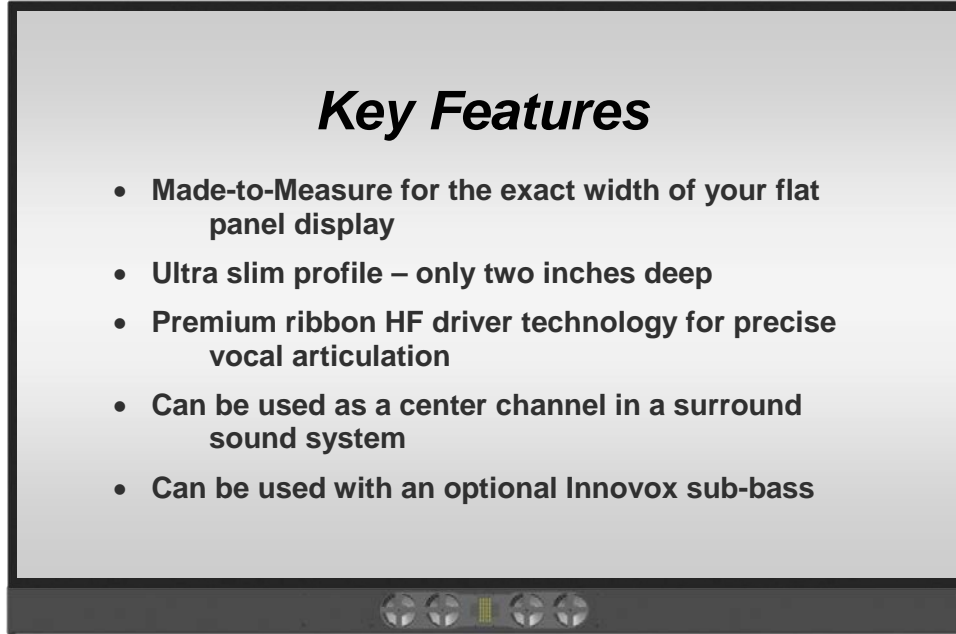

(shown without grille)

## DESCRIPTION

The **Flex Precision** Model **FP-H1** is an ultra slim single-channel horizontal loudspeaker designed to mate with flat panel video displays. It has been developed to complement superior flat panel video displays with high resolution audio. Premium low frequency drivers are employed in combination with precision ribbon HF drivers and sophisticated sequential filter networks to render an audio signal of exceptional clarity and detail. Nominal coverage angle is 90° H x 120° V. Configuration includes four 3.5" long-excursion LF drivers and a precision ribbon HF driver.

### NOMINAL DATA

Frequency Response	120 – 20,000 Hz, ± 3 dB
Sensitivity	92 dB @ 2.83 volts / 1M
Impedance	6 Ω
Power Handling	180 W long term (AES-2) (per channel)
Maximum Output	105 dB long term; 111 dB peak
Nominal Coverage Angles	90° H x 120° V
Dimensions	height: 4.10" width: 32.00 – 96.00" (custom) depth: 2.10"
Net Weight	12-22 lbs. (depending on length)
Shipping Weight	15-25 lbs. (depending on length)

### DESCRIPTIVE DATA

System Configuration	Display-mounted center channel
Components & Loading	(4) 3.5" long-excursion LF drivers; (1) 3.25" ribbon HF driver
Recommended High-Pass	4 <sup>th</sup> order Butterworth @ 100 Hz
Enclosure Type	Sealed enclosure
Enclosure Material	Extruded ABS with steel baffle plate
Finish	Black is standard; (custom colors optional)
Connectors	Phoenix
Grille	Integral fabric wrap