

## Arrayable High Output Sub-Bass

The **SBA-218** employs a pair of 18-inch long-excursion drivers in an optimally tuned vented enclosure. It is an ideal choice for applications requiring precise transient response and low bass extension in a compact very high output package.

The **SBA-218** is frequently used as a single unit, or in multiples to create cardioid bass arrays. Its compact size fits well under stages or on stage.



### Key Features

- Compact size
- Bass extension to 27 Hz
- Very high output
- Excellent transient response
- Component of Cardioid Bass Arrays

### Applications

- Churches
- Performing Arts Centers
- Cinema
- Night Clubs

### Description

System Configuration	Dedicated sub-bass
Components & Loading	(2) 18" long-excursion cone drivers
Recommended High-Pass Filter	4th order Butterworth @ 24 Hz
Input Connectors	(3) NL-4
Enclosure Type	Optimally tuned, vented
Enclosure Material	Hardwood multi-ply plywood
Finish	Black or White standard (custom colors available)
Suspension Hardware	(12) 3/8-16 threaded mounting points located on enclosure sides
Grille	Painted perforated steel

### Nominal Data


Frequency Response	27 – 350 Hz ±3 dB
Sensitivity	101 dB @ 2.83 volts / 1M (in operating band)
Impedance	(2) x 8 Ω
Power Handling	3200 W long-term (AES-2)
Maximum Long-Term Output	135 dB @ 1M
Peak Output	141 dB @ 1M
Nominal Coverage Angles	Omni-directional
Dimensions Height	21.07" / 535 mm
Width	38.38" / 975 mm
Depth	30.60" / 777 mm
Net Weight	198 lbs / 90.0 kg
Shipping Weight	228 lbs / 103.6 kg

Sub-Bass Series

# SBA-218



## Arrayable High Output Sub-Bass

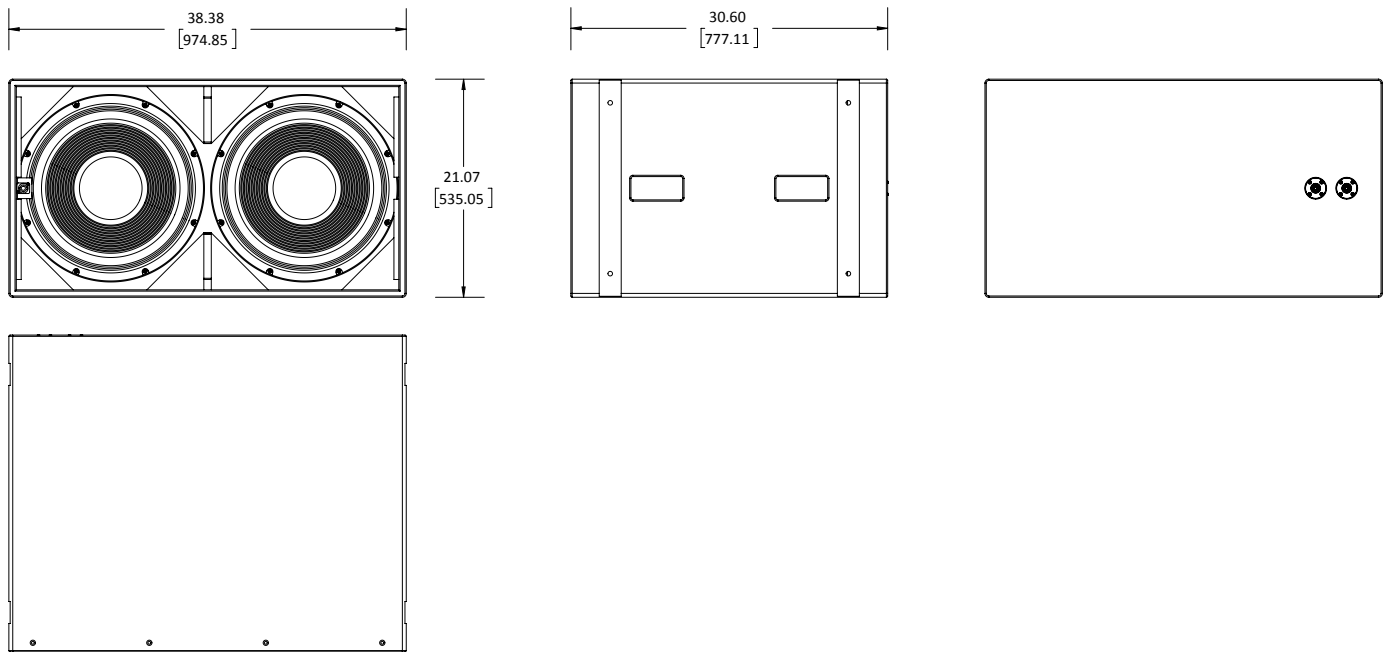

## Optional Accessory

### SBA-218 Fly-bar

The SBA-218 Fly-bar will support a vertical hang of up to six SBA-218 enclosures.

