HLA-1635P

Hybrid Line Array Series



EXPERIENCE THE SOUND OF TRUE ENGAGEMENT

True Sound Engagement in Large Venues

DESCRIPTION

The **HLA-1635P** is a hybrid integration of a sixteen element J-array loudspeaker and a dipole directional low frequency loudspeaker. It is powered by two Powersoft internal 1500W amplifiers with on-board DSP.

The J-array portion contains sixteen 3.5" mid-frequency drivers and sixteen ribbon high frequency drivers. The low frequency portion incorporates two 14" high-output low frequency drivers in a dipole configuration to extend vertical LF control.

It has been preconfigured in an asymmetrical 120° H by 35° V coverage pattern with vertical directivity to 135 Hz, and low frequency response to 50 Hz.



KEY FEATURES

- Asymmetrical 120° H x 35° V Coverage
- Power and DSP by Powersoft
- Maintains Vertical Control to 135 Hz

APPLICATIONS

- Churches
- Lecture Halls
- Presentation Spaces
- Performing Arts Centers

DESCRIPTIVE DATA

System Configuration:	Biamped hybrid integration of a curvilinear M/H line array and a low frequency dipole
Components & Loading:	(16) 3.5" MF drivers; (16) 3" ribbon HF drivers; (2) 14" LF drivers
Input:	Balanced line level with XLR
Enclosure Type:	Curvilinear array: sealed enclosure Dipole LF: sealed enclosure
Enclosure Material:	Steel, aluminum & Baltic Birch plywood
Finish:	Black or White standard (custom colors available)
Suspension Hardware:	(2) 3/8-16 threaded points on each side; steel yoke included
Grille:	Painted perforated steel


NOMINAL DATA

Frequency Response:		50 – 20,000 Hz ±3 dB
Class D Power:		2 x 1500 W RMS
Maximum Long-Term Output: Peak Output:		123 dB 129 dB
Nominal Coverage Angles:		120° H x 35° V
Dimensions	Height: Width: Depth:	59.44" / 1510 mm 15.44" / 392 mm 12.25" / 311mm
Net Weight:		114 lbs / 51.8 kg
Shipping Weight:		133 lbs / 60.5 kg

HLA-1635P

Hybrid Line Array Series



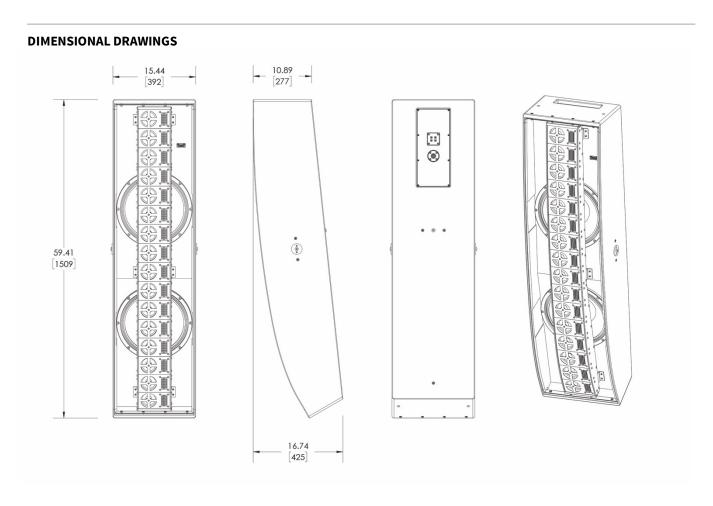

INCLUDED HARDWARE

OPTIONAL HARDWARE

U-bracket





Wall-Mount

HLA-9-WM