

### Made-to-Measure for the Exact Width of Your Flat Panel Display



#### DESCRIPTION

Flex Select display mount loudspeakers provide a “value solution” in an ultra slim enclosure with natural sounding textile dome HF drivers and efficient woofers.

Nominal coverage angle is 100° H x 120° V. Configuration per channel includes two 3.5” long-excursion LF drivers and one .75” textile dome HF driver.

#### KEY FEATURES

- Made to match width of video display
- Textile Dome HF provides balanced neutral sound
- Works with Micro-Sub Series Subwoofers

#### APPLICATIONS

- Stereo video conference speaker
- Audio to complement digital signage
- Uniform sound coverage for near-field Applications

#### DESCRIPTIVE DATA

System Configuration:	Low profile custom-sized side-mount speaker for flat-panel displays
Components & Loading: (per channel)	(2) 3.5” long-excursion LF drivers; (1) .75” textile dome HF driver
Recommended High-Pass:	On-board 1 <sup>st</sup> order @ 120 Hz; no outboard HP needed
Enclosure Type:	Very low profile, sealed, integral grille
Enclosure Material:	Extruded ABS plastic with steel baffle plate
Finish:	Black fabric
Connectors:	Phoenix
Grille:	Integral fabric wrap

#### NOMINAL DATA

Frequency Response:	120 – 20,000 Hz ±3 dB
Sensitivity:	90 dB @ 2.83 volts / 1M
Impedance:	6 Ω per channel
Power Handling:	90 W (AES-2) per channel
Maximum Long-Term Output: Peak Output:	105 dB 111 dB
Nominal Coverage Angles:	120° H x 100° V
Minimum Height:	19.00” / 483 mm
Dimensions	Height: Width: Depth:
	(custom) 4.06” / 103 mm 2.13” / 54 mm
Approximate Net Weight/pair: (varies with length)	7 lbs. / 3.2 kg – 15 lbs. / 6.8 kg
Approximate Shipping Weight/pair: (varies with length)	9 lbs. / 4.1 kg – 17 lbs. / 7.7 kg



# FS-V2

Flex Select™ Series



EXPERIENCE THE SOUND  
OF TRUE ENGAGEMENT

## DIMENSIONAL DRAWINGS

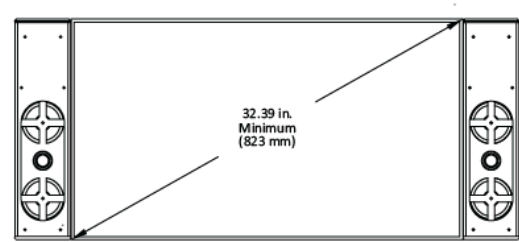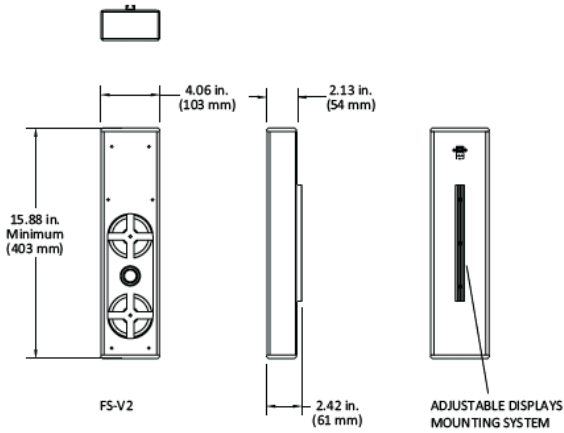

CONNECTION DETAILS

