

# Micro-Sub 6



EXPERIENCE THE SOUND  
OF TRUE ENGAGEMENT


## Micro-Sub Series

### Ultra-Compact Sub-Bass Loudspeakers

#### DESCRIPTION

The **Micro-Sub 6** is a high definition subwoofer designed for permanent installation. It uses a 6.5" low frequency driver in a very compact sealed enclosure. It should be used in conjunction with out-board active equalization to achieve superior transient response and maximum output. This sophisticated DSP processing can be provided by an Innovox proprietary powered system processor.

The **Micro-Sub 6** complements the Innovox *Slim Line Series* of shallow profile surface-mount loudspeakers, and the *Flex Video Series* of display-mounted loudspeakers. It also is used as a low-bass component in extended range distributed audio systems.

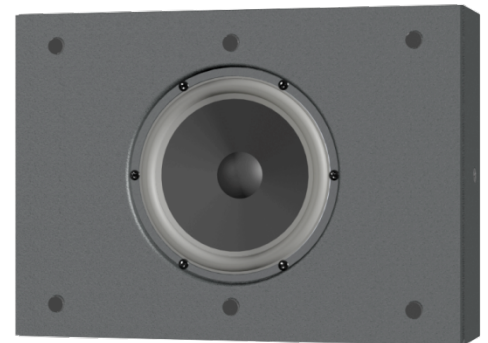

#### KEY FEATURES

- Very compact enclosure (only 4.10" deep)
- Excellent transient response
- LF extension to 45Hz

#### APPLICATIONS

- Sound for video presentations
- Themed venues and restaurants
- Boardrooms
- Retails Spaces

#### DESCRIPTIVE DATA

System Configuration:	Dedicated low frequency
Components:	(1) 6.5" LF driver
Recommended High-Pass Filter:	4 <sup>th</sup> order Butterworth @46 Hz
Cabinet Type:	Rectangular, sealed enclosure
Enclosure Material:	Hardwood multi-ply plywood
Finish:	Black or White (custom colors available)
Connectors:	2-pole Phoenix
Suspension Hardware:	(2) ¼"-20 threaded mounting points
Grille:	Painted perforated steel

#### NOMINAL DATA

Frequency Response:	45 – 350 Hz $\pm$ 3 dB
Nominal Impedance:	8 $\Omega$
Power Handling:	175 W long term (AES-2)
Maximum Long-Term Output:	102 dB
Peak Output:	108 dB
Dimensions	Height: 10.13" / 257 mm
	Width: 14.13" / 359 mm
	Depth: 4.10" / 104 mm
Net Weight:	11 lbs / 5.0 kg
Shipping Weight:	14 lbs / 6.4 kg

# Micro-Sub 6

Micro-Sub Series



EXPERIENCE THE SOUND  
OF TRUE ENGAGEMENT

## DIMENSIONAL DRAWINGS

