


Compensating for Loss of High Frequency Transients Essential for Speech Intelligibility

The **AE-MicroLift** is an ultra-slim 2-way loudspeaker designed to be surface-mounted on tabletops, pew backs or flat on a wall. It employs a precision Air Motion Transformer HF driver and a 2.5" long-excursion mid bass driver to deliver the exceptional definition and the voice clarity of face-to-

face communication. Two AE-MicroLifts can be combined with an available Innovox micro subwoofer, to extend LF frequency response to 50 Hz and create an ultra-compact 2.1 system.

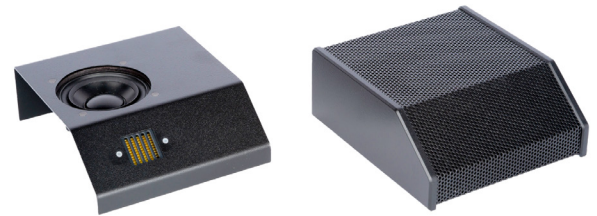

Key Features

- 130° H x 130° V Coverage Pattern
- Superior Transient Response of AMT HF driver
- Very Thin Profile

Applications

- Desk-top Articulation Extender
- Pew-back Speaker
- Mid-High Frequency Component of Very Compact 2.1 System

Technical Specifications

DESCRIPTIVE DATA

System configuration	Low profile 2-way
Options	25V & 70V transformer; On-Off switch
Input Connectors	2-pole Phoenix
Enclosure Material	Steel chassis, with aluminum endcaps
Enclosure Type	Sealed, ultra-slim profile
Finish	Black, white or bronze (custom colors available)
Grille	Perforated metal grille
Suspension	Hidden bracket included

ACOUSTICAL DATA

Frequency Response	150 Hz--20 KHz ±3dB
Coverage Angles	130° H x 130° V
Maximum Long-Term Output	98 dB
Peak Output	101 dB @ 1 meter
Sensitivity	85.3 dB @ 2.83 volts / 1M
Impedance	4 Ω
Power Handling	20 W long term (AES-2)

PHYSICAL

Height	2.19" / 56 mm
Width	5.50" / 140 mm
Depth	5.80" / 147 mm
Net Weight	2 lbs / 0.9 kg
Shipping Weight	4 lbs / 1.8 kg

Dimensional Drawings

