

# FF-H1.50 7585 / FF-H1.50 8698

Flex Focus™ Series



## Horizontal Line Array Solution for Longer Rooms

The **FF-H1.50 7585 / FF-H1.50 8698** loudspeaker employs shaded line array technology with ribbon high frequency drivers to extend sound projection in longer rooms. Their frequency response (120 Hz - 20 kHz  $\pm$  3 dB) is optimized for speech intelligibility and musical detail.

The **FF-H1.50 7585 / FF-H1.50 8698** loudspeaker pairs can be used in combination with an Innovox Micro-Sub Series subwoofer to extend low frequency response to support full-range music program.



### Key Features

- Made To Match Width Of Video Display
- Ribbon Hf Driver Provides Speech Clarity
- Precise 50° Horizontal Control
- Line Array Projection For Longer Rooms

### Applications

- Mono Video Conference Speaker
- Audio To Compliment Digital Signage
- Managed Sound Coverage for Museum Displays

## Technical Specifications

### DESCRIPTIVE DATA

System configuration	Frequency-shaded line array
Components & Loading	(6) 3.5" LF drivers; (1) ribbon HF driver.
Nominal Impedence	8Ω
Input Connectors	2-pole Phoenix
Enclosure Material	Extruded ABS plastic with ABS endcaps
Enclosure Type	Sealed enclosure, low profile column
Grille	Integral, fabric wrap, color black
Suspension Options (Specify #1 or #2 when ordering)	#1 - Adjustable universal bracket for direct mount to display #2 - Wall-mount

### ACOUSTICAL DATA

Frequency Response	120 Hz-20 KHz $\pm$ 3dB
Sensitivity	95 dB @ 2.83 volts / 1M
Pattern Control to	650 Hz
Nominal Coverage	50° H x 120° V
Long Term Power Handling	200 W (AES-2)
Maximum Long-term Output	116 dB
Peak Output	122 dB

### PHYSICAL


Minimum Display Width	37" / 940 mm
Height	4.06" / 103 mm
Width	(custom)
Depth	2.13" / 54 mm
Net Weight (varies with length)	14 - 26 lbs. / 6.4 - 11.8 kg
Shipping Weight/pair (varies with length)	18 - 30 lbs. / 8.2 - 13.6 kg

# FF-H1.50 7585 / FF-H1.50 8698


Flex Focus™ Series



## Dimensional Drawings

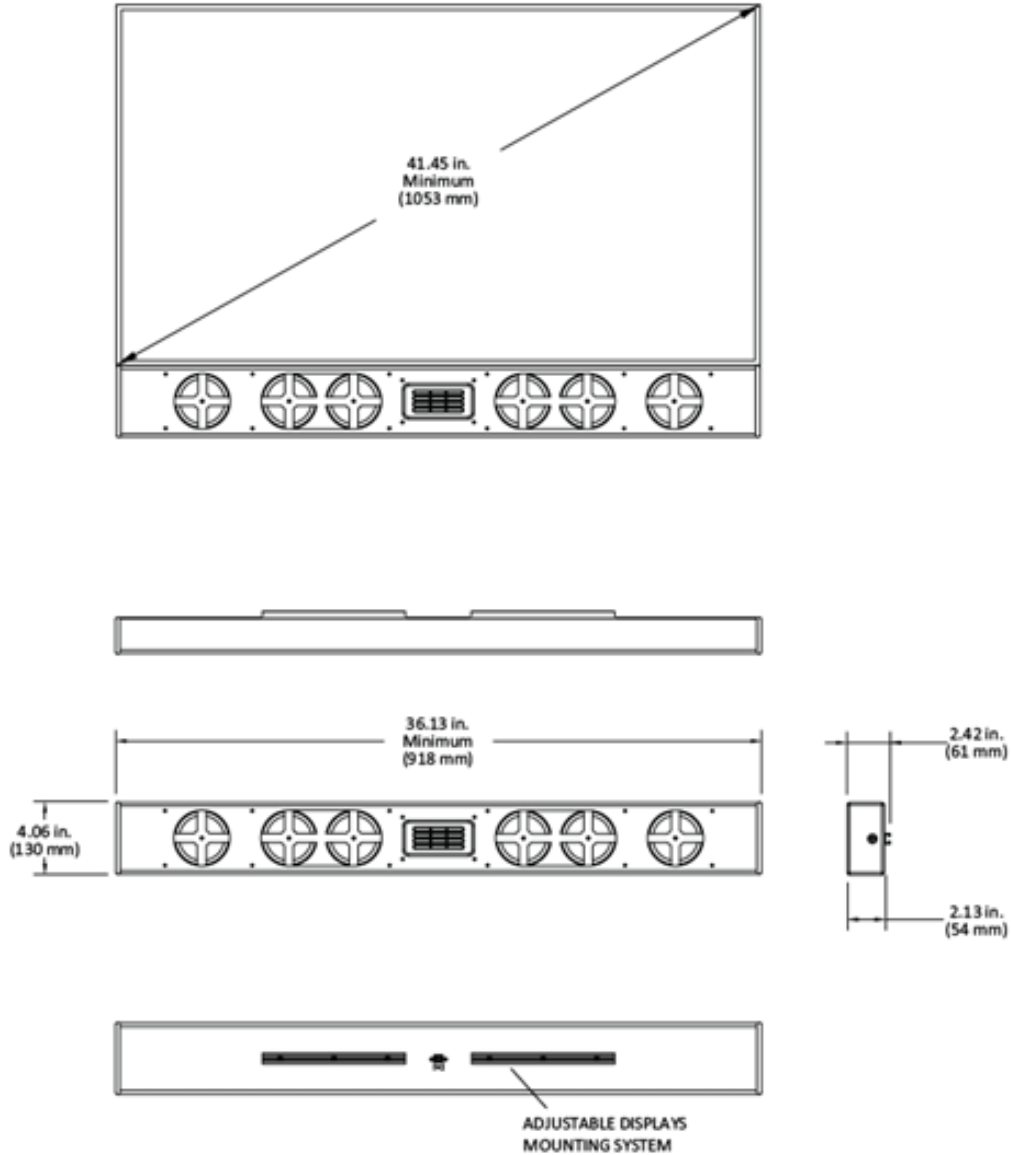

### CONNECTION DETAILS



# FF-H1.50 7585 / FF-H1.50 8698

Flex Focus™ Series

---

