

## Made-to-Measure for the Exact Width of Your Flat Panel Display

The Flex Precision FP-H1 is a display mounted single channel horizontal loudspeaker that employs ribbon HF and extended range LF drivers in an ultra slim enclosure. Its frequency response (120 Hz – 20 kHz  $\pm$  3 dB) has been optimized for speech intelligibility.

Flex Precision loudspeakers can be used in combination with an Innovox Micro-Sub Series sub-woofer to extend low frequency response below 50 Hz to support full-range music program.



### Key Features

- Made To Match Width Of Video Display
- Ribbon HF and Forward-Motor Drivers Provides Superior-Speech Clarity
- Works with Micro-Sub Series Subwoofers

### Applications

- Mono Video Conference Speaker
- Audio To Compliment Digital Signage
- Managed Sound Coverage for Museum Displays
- Uniform Sound Coverage for Near Field Operations

## Technical Specifications

### DESCRIPTIVE DATA

System configuration	Display-mounted horizontal center channel
Components & Loading	(4) 3.5" LF drivers; (1) 3.25" ribbon HF driver.
Nominal Impedence	6 $\Omega$
Input Connectors	2-pole Phoenix
Enclosure Material	Extruded ABS plastic with ABS endcaps
Enclosure Type	Sealed enclosure, low profile column
Grille	Integral, fabric wrap, color black
Suspension	Adjustable universal bracket for direct mount to display


### ACOUSTICAL DATA

Frequency Response	120 Hz--20 KHz $\pm$ 3dB
Sensitivity	92 dB @ 2.83 volts / 1M
Nominal Coverage	90° H x 120° V
Long Term Power Handling	90 W (AES-2)
Maximum Long-term Output	105 dB
Peak Output	111 dB

### PHYSICAL

Minimum Display Width	25.37" / 644 mm; (can be custom ordered with two 3.5: drivers for shorter version of 18.21" / 462 mm)
Height	4.06" / 103 mm
Width	(custom)
Depth	2.13" / 54 mm
Net Weight/Pair (varies with length)	8 - 22 lbs. / 3.6 - 9.9 kg (weight varies with length)
Shipping Weight/pair (varies with length)	12 - 26 lbs. / 5.4 - 11.7 kg

## Dimensional Drawings

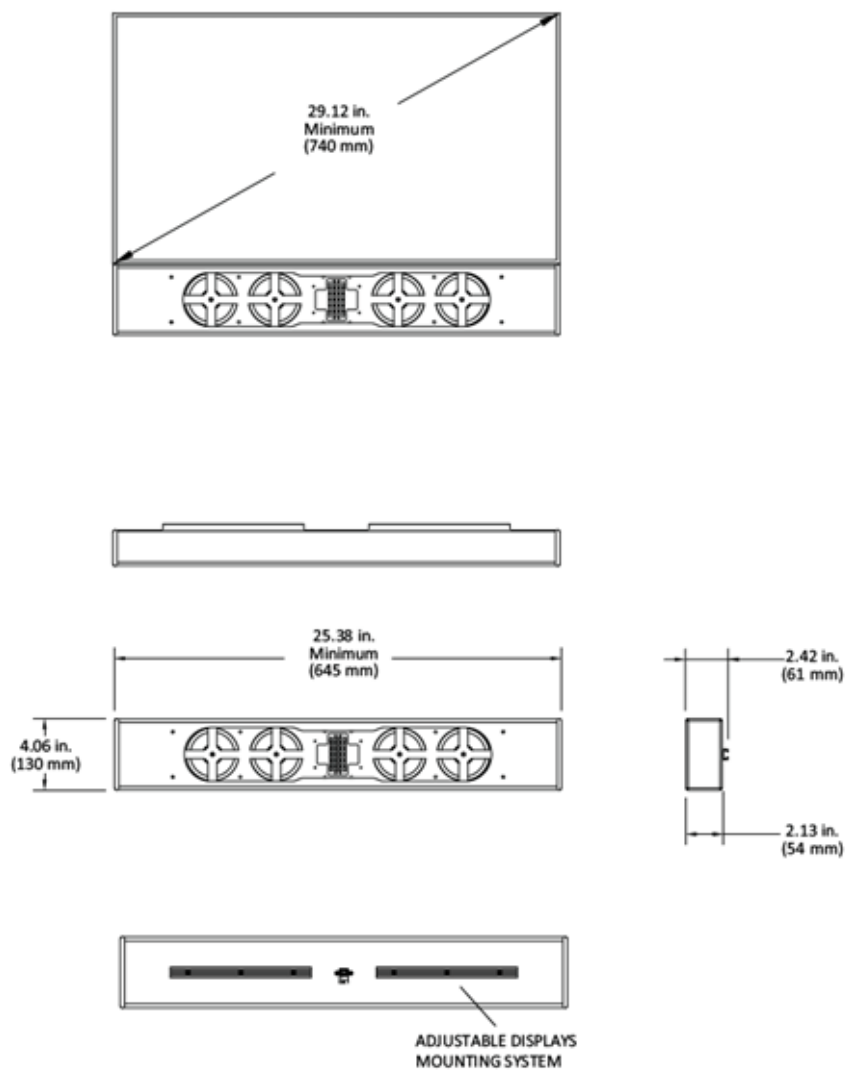

### CONNECTION DETAILS



